

CONCRETE CRUSHER CC580

The reliable powerhouse




Specifications | Concrete Crusher CC580


Dimensions and weight		
Length x Width x Height	967 x 934 x 400 mm	38x36x16 in
Jaw opening	565 mm	22 in
Weight ¹	360 kg	790 lb
Carriers		
Recommended carrier weight, max. ²	5.5 - 9 t	12130 - 19840 lb
Recommended Brokk machine	Brokk 300	
Hydraulic connection		
Connection pressure, min.	17.5 MPa (175 bar)	2538 psi
Connection pressure, max.	25 MPa (250 bar)	3626 psi
Oil flow, min. - max.	40 - 100 l/min	11 - 27 gal/min
Operating pressure	50 MPa (500 bar)	7252 psi
Power output		
Crushing force A, max.	530 kN (54 t)	119000 lbf
Crushing force B, max. (optional)	814 kN (83 t)	183000 lbf
Cutting force, max.	2324 kN (237 t)	523000 lbf
Cutting capacity, max.	1x Ø 30 mm	1 1/4 in
Ordering information		
Article no. ¹	9033 0580 80	

¹ Without mounting plate

² Depending on carrier lifting capacity

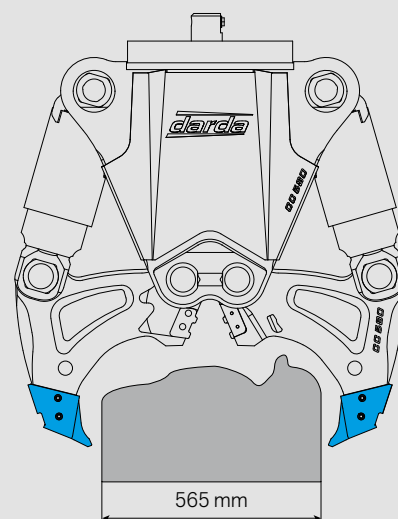

Crusher with standard crushing tips

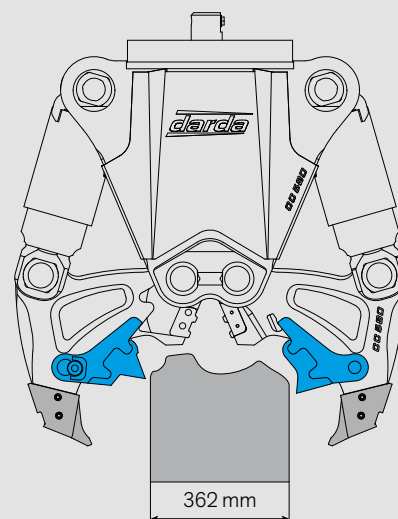


Crusher with additional crushing tips

Available options



360° Hydraulic rotary drive



Additional crushing tip