


# MULTI CUTTER MC200

Break-up work  
at a high level

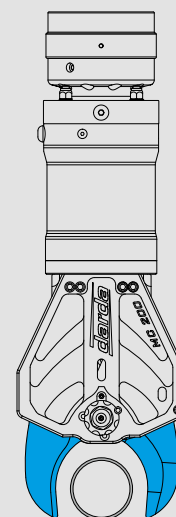

## Facts

- 50 t | 110200 lbf cutting force
- Ideal for building core removal
- Simple regrinding of blades
- High productivity
- Low wear costs

## Specifications | Multi Cutter MC200

Dimensions and weight		
Length x Width x Height	1000 x 232 x 334 mm	39 x 9 x 13 in
Jaw opening	200 mm	8 in
Weight <sup>1</sup>	147 kg	324 lb
Carriers		
Recommended carrier weight, max. <sup>2</sup>	1.2 - 2.8 t	2650 - 6170 lb
Recommended Brokk machines	Brokk 110/120D / 170	
Hydraulic connection		
Connection pressure, min.	17.5 MPa (175 bar)	2538 psi
Connection pressure, max.	19 MPa (190 bar)	2756 psi
Oil flow, min. - max.	25 - 60 l/min	7 - 16 gal/min
Rotary drive connection pressure, max.	19 MPa (190 bar)	2756 psi
Rotary drive oil flow, max.	60 l/min	16 gal/min
Operating pressure	19 MPa (190 bar)	2756 psi
Power output		
Cutting force, max.	490 kN (50 t)	110200 lbf
Cutting capacity (selection of profiles)		
● Ø 150 mm	6 in	
⊥ 100 x 55 x 6.3 mm	3.9 x 2.5 x 0.2 in	
○ Ø 90 x 4 mm	3.5 x 0.2 in	
— 80 x 8 mm (stainless steel)	3.1 x 0.3 in (stainless steel)	
Ordering information		
Article no. <sup>1</sup>	9014 0390 00	

<sup>1</sup> Without mounting plate

<sup>2</sup> Depending on carrier lifting capacity