


MULTI CUTTER MC300

Highest cutting
force with
low weight

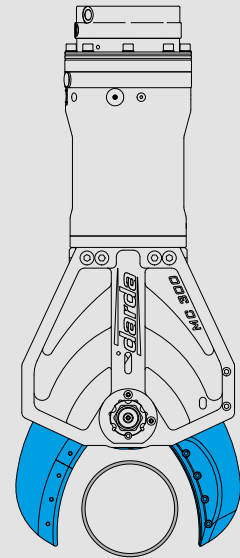

Facts

- 60 t | 132300 lbf cutting force
- Ideal for building core removal
- Simple regrinding of blades
- High productivity
- Low wear costs

Specifications | Multi Cutter MC300

Dimensions and weight		
Length x Width x Height	1275 x 300 x 538 mm	50 x 12 x 21 in
Jaw opening	350 mm	14 in
Weight ¹	310 kg	685 lb
Carriers		
Recommended carrier weight, max. ²	2.5 - 9 t	5510 - 19840 lb
Recommended Brokk machines	Brokk 200 / 300	
Hydraulic connection		
Connection pressure, min.	17.5 MPa (175 bar)	2538 psi
Connection pressure, max.	19 MPa (190 bar)	2756 psi
Oil flow, min. - max.	25 - 60 l/min	7 - 16 gal/min
Rotary drive connection pressure, max.	19 MPa (190 bar)	2756 psi
Rotary drive oil flow, max.	60 l/min	16 gal/min
Operating pressure	19 MPa (190 bar)	2756 psi
Power output		
Cutting force, max.	590 kN (60 t)	132300 lbf
Cutting capacity (selection of profiles)		
⊙ Ø 180 mm	7 in	
⊏ 120 x 64 x 6.3 mm	4.7 x 2.5 x 0.2 in	
○ Ø 140 x 4.85 mm	5.5 x 0.2 in	
— 80 x 15 mm (stainless steel)	3.1 x 0.6 in (stainless steel)	
Ordering information		
Article no. ¹	9014 0400 79	