


Facts

- Cold cut alternative to flame cutting or abrasive cutting
- Ideal for dismantling tanks and plates in buildings
- Adjustable blade clearance for thick and thin sheet metal gages
- Exchangeable blades
- Up to 20 cm | 8 inches per cut
- Maintenance-friendly and rugged

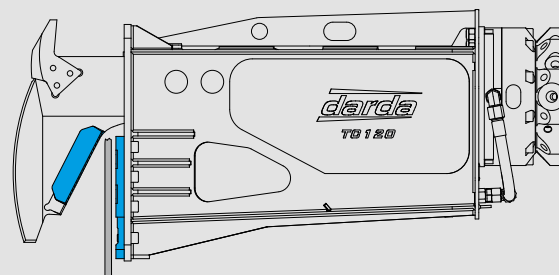

Specifications | Tank Cutter TC120

Dimensions and weights		
Length x Width x Height	1200 x 430 x 528 mm	47 x 17 x 21 in
Jaw opening	125 mm	5 in
Weight ¹	270 kg	600 lb
Carriers		
Recommended carrier weight ²	3 - 8 t	6610 - 17640 lb
Recommended Brokk machines	Brokk 200 / 300	
Hydraulic connection		
Connection pressure, min.	17.5 MPa (175 bar)	2538 psi
Connection pressure, max.	25 MPa (250 bar)	3626 psi
Oil flow, min. - max.	25 - 100 l/min	7 - 27 gal/min
Rotary drive connection pressure, max.	25 MPa (250 bar)	3626 psi
Rotary drive oil flow, max.	50 l/min	13 gal/min
Operating pressure	42 MPa (420 bar)	6092 psi
Power		
Cutting force, max.	590 kN (60 t)	132300 lbf
Cutting capacity (selection of profiles)		
— VA2	t = 12 mm	0.5 in
— S355	t = 15 mm	0.6 in
○	Ø 95 x 5 mm	3.7 x 0.2 in
Ordering information		
Article no. ¹	9014 0381 00	

¹ Without mounting plate

² Depending on carrier lifting capacity