


MULTI CUTTER MC300 CABLE CUTTER

Highest cutting
force with
low weight

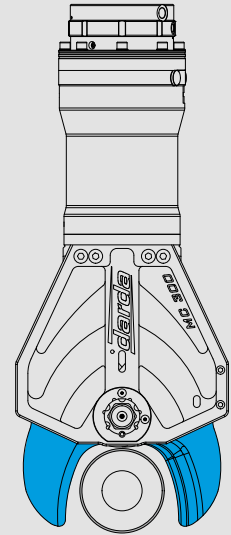

Facts

- 60t | 132300 lbf cutting force
- Ideal for cutting cable up to Ø 200 mm
- Simple regrinding of jaws
- High productivity

Specifications | Multi Cutter MC300

Dimensions and weight		
Length x Width x Height	1270 x 300 x 538 mm	50 x 12 x 21 in
Jaw opening	330 mm	13 in
Weight ¹	300 kg	663 lb
Carriers		
Recommended carrier weight, max. ²	2.5 - 9 t	5510 - 19840 lb
Recommended Brokk machines	Brokk 200 / 300	
Hydraulic connection		
Connection pressure, min.	17.5 MPa (175 bar)	2538 psi
Connection pressure, max.	19 MPa (190 bar)	2756 psi
Oil flow, min. - max.	25 - 60 l/min	7 - 16 gal/min
Rotary drive connection pressure, max.	19 MPa (190 bar)	2756 psi
Rotary drive oil flow, max.	60 l/min	16 gal/min
Operating pressure	19 MPa (190 bar)	2756 psi
Power output		
Cutting force, max.	590 kN (60 t)	132300 lbf
Cutting capacity		
⊙ Ø 200 mm	7,87 in	
Ordering information		
Article no. ¹	9014 0402 80	