CONCRETE CRUSHER CC440

The latest generation

Specifications | Concrete Crusher CC440

Dimensions and weight		
Length x Width x Height	868 x 846 x 330 mm	35 x 33 x 13 in
Jaw opening	440 mm	17 in
Penetration depth, approx.	202 mm	8 in
Weight [1]	235 kg	520 lb
Carriers		
Recommended carrier weight, max. [2]	2,5 - 4,5 t	5510 - 9920 lb
Recommended Brokk machine	Brokk 170	
Hydraulic connection		
Connection pressure, min.	17,5 MPa	2538 psi
Connection pressure, max.	25 MPa	3626 psi
Oil flow, min. - max.	40 - 100 l/min	11 - 27 gal/min
Operating pressure	50 MPa	7252 psi
Power output		
Crushing force A, max.	431 kN (44 t)	97000 lbf
Crushing force B, max. (optional)	568 kN (58 t)	128000 lbf
Cutting force, max.	1560 kN (159 t)	351000 lbf
Cutting capacity, max.	1x Ø 30 mm	1 1/4 in

[1] Without mounting plate [2] Depending on carrier lifting capacity

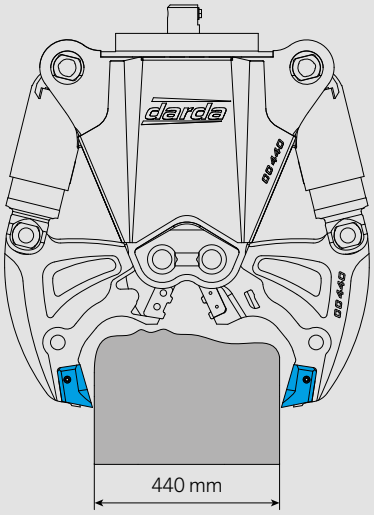

Crusher with standard crushing tips

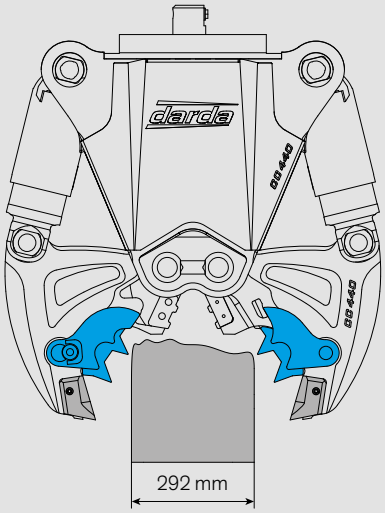

Crusher with additional crushing tips

Available options

360° Hydraulic rotary drive



Additional crushing tip



Jaw set / Steel Shear