MULTI CUTTER MC300

Highest cutting force with low weight

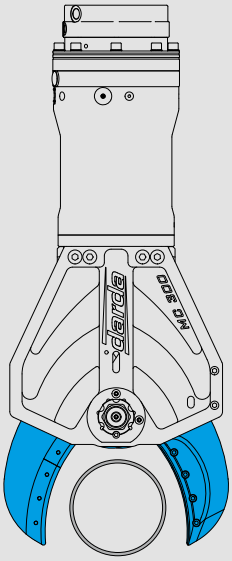

Facts

- 60 t | 132300 lbf cutting force
- Ideal for building core removal
- Simple regrinding of blades
- High productivity
- Low wear costs

Specifications | Multi Cutter MC300

Dimensions and weight			
Length x Width x Height		1275 x 300 x 538 mm	50.2 x 11.8 x 21.2 in
Jaw opening		350 mm	13.8 in
Weight [1]		310 kg	682 lb
Carriers			
Recommended carrier weight, max. [2]		2,5 - 9 t	5510 - 19840 lb
Recommended Brokk machines			Brokk 200 / 300
Hydraulic connection			
Connection pressure, min.		17,5 MPa	2538 psi
Connection pressure, max.		19 MPa	2756 psi
Oil flow, min. - max.		25 - 60 l/min	7 - 16 gal/min
Rotary drive connection pressure, max.		19 MPa	2756 psi
Rotary drive oil flow, max.		60 l/min	16 gal/min
Operating pressure		19 MPa	2756 psi
Power output			
Cutting force, max.		590 kN (60 t)	132300 lbf
Cutting capacity (selection of profiles)			
I	120 x 64 x 6,3 mm	4.7 x 2.5 x 0.25 in	
○	Ø 140 x 4,85 mm	5.5 x 0.19 in	
—	80 x 15 mm (stainless steel)	3.1 x 0.6 in (stainless steel)	

[1] Without mounting plate [2] Depending on carrier lifting capacity