

CONCRETE CRUSHER CC700


The strongest in its weight class




Specifications | Concrete Crusher CC700

Dimensions and weight		
Length x Width x Height	1226 x 1140 x 562 mm	48 x 45 x 22 in
Jaw opening	650 mm	26 in
Weight ¹	535 kg	1180 lb
Carriers		
Recommended carrier weight, max. ²	7 - 15 t	15430 - 33060 lb
Recommended Brokk machines	Brokk 500 / 520D / 900	
Hydraulic connection		
Connection pressure, min.	17.5 MPa (175 bar)	2538 psi
Connection pressure, max.	25 MPa (250 bar)	3626 psi
Oil flow, min. - max.	25 - 100 l/min	7 - 27 gal/min
Operating pressure	50 MPa (500 bar)	7252 psi
Power output		
Crushing force A, max.	680 kN (70 t)	153000 lbf
Crushing force B, max. (optional)	1141 kN (116 t)	256000 lbf
Cutting force, max.	2174 kN (222 t)	489000 lbf
Cutting capacity, max.	1x Ø 30 mm	1 1/4 in
Ordering information		
Article no. ¹	9033 0700 80	

¹ Without mounting plate ² Depending on carrier lifting capacity

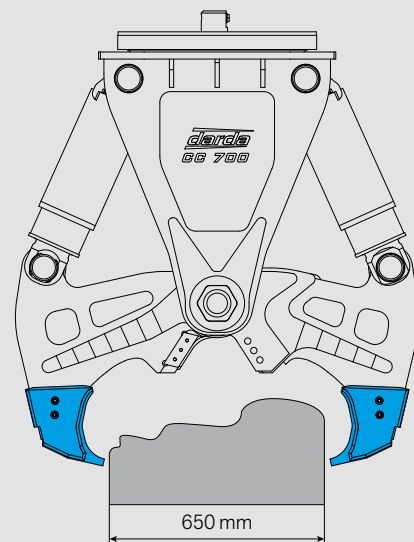

Crusher with standard crushing tips

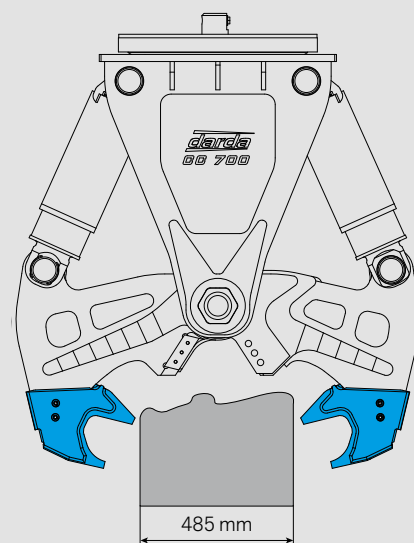


Crusher with double crushing tips


Available options




360° Hydraulic rotary drive



Multi crushing tip



Double crushing tip



Jaw set / Steel Shear